


KTA6 OPEN RAIL

The A6 Open Rail system provides for classic open rail design featuring an exposed bracket mounted 75mm diameter grooved wheel with a precision ground bearing.

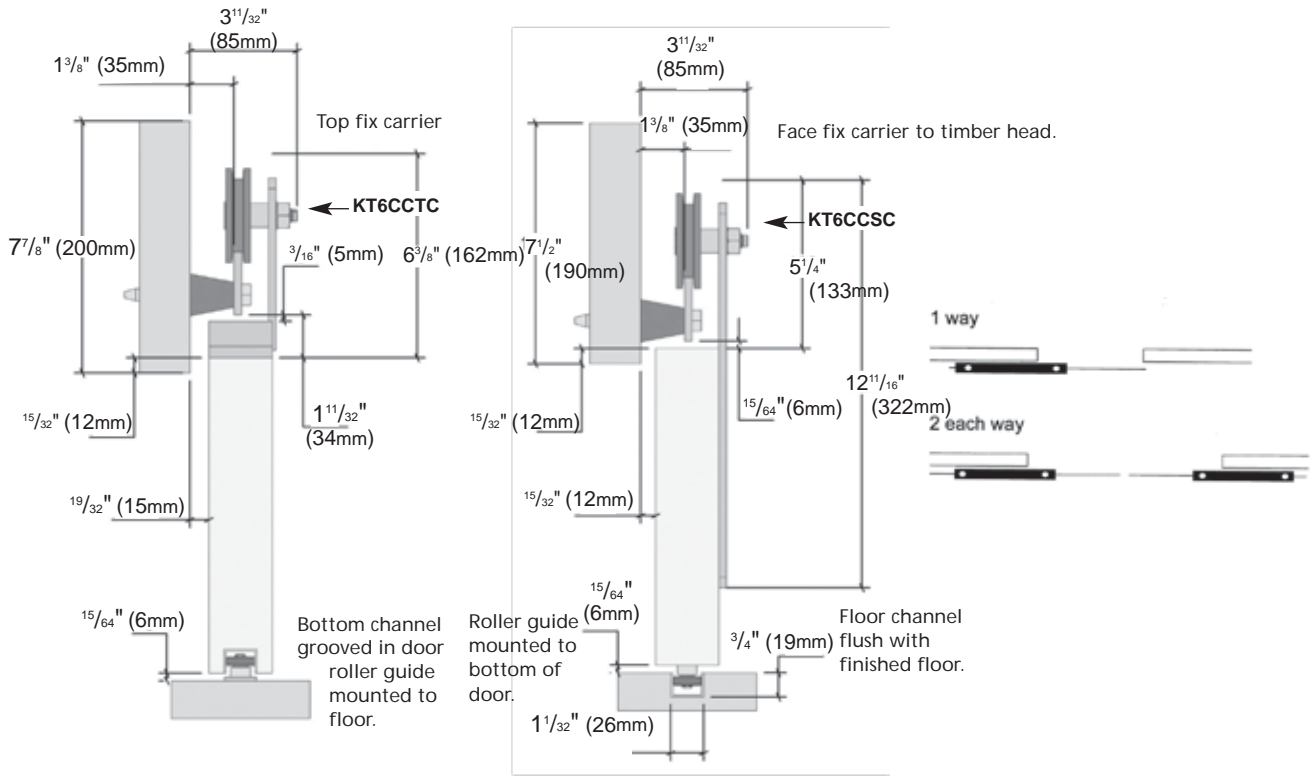

PANEL SIZING

Weight dictates door dimensions, however for panels over 10 ft. (3000mm) wide, use three carriers for additional lateral support. If using three, adjust the middle carrier high to avoid it bearing any load.

SECURITY

For secure installations, ensure that top and bottom clearances are not sufficient to allow the door to be lifted off the track.

MATERIALS

A6 Track is tailor made with 50 x 6 flat mild steel bar with side fixing holes at approximately 600mm centres, depending on overall length of track. As standard, Safety Stops are welded to both ends of the track. Tracks are made in one piece up to 158" (4m). For over 158" (4m), track is in two or more pieces and is made with a bolted splice / joining bar in the centre of the overall track length.

3 STANDARD LENGTHS AVAILABLE

Finished: Satin Chrome with welded stops, spacers & predrilled.

KT6T2SC - 79" (2m)


KT6T3SC - 118" (3m)

KT6T4SC - 158" (4m)

L = track length including safety stops
 HC - fixing hole centres, maximum 609mm centres (24")

Max door weight	300kg (650lb) = 2 carriers
Max door thickness	50mm (2")
Max door height	4000mm (13'1")
Max door width	6000mm (19'8")

NOTE:
KTA6 OPEN RAIL SOLD AS COMPLETE SYSTEM ONLY, TRACK HANGERS, GUIDES OR STOPS

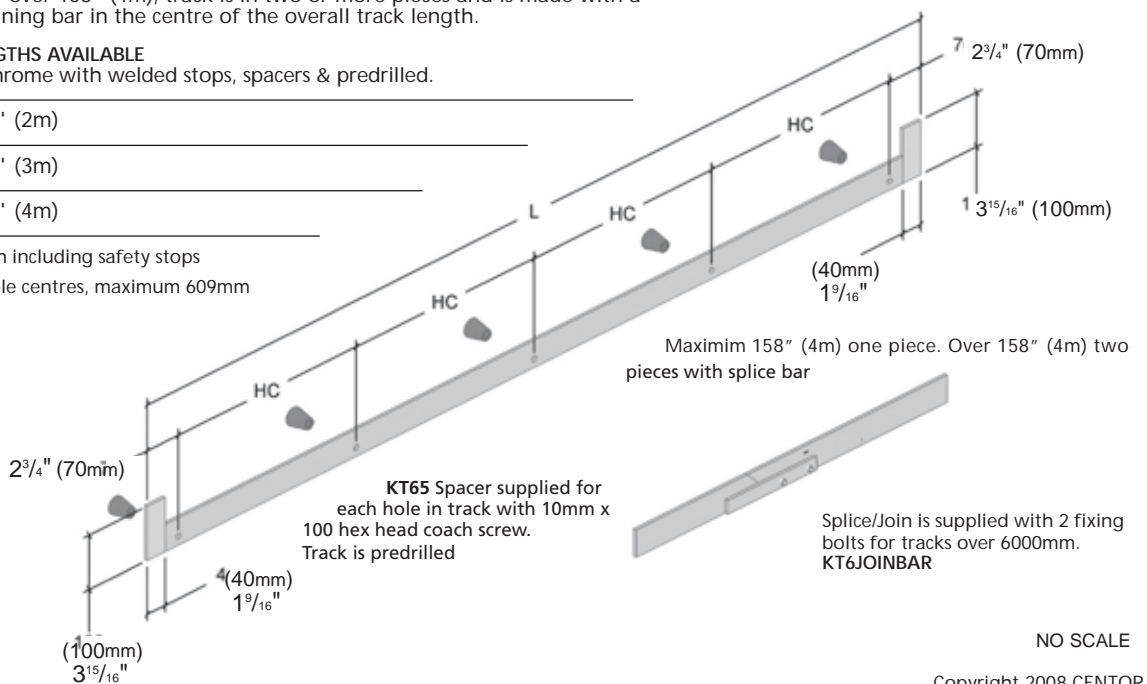

NO SCALE

Copyright 2008 CENTOR