


KT-Radius Series

Arc Length (AL)


- R** = Radius (length from the C.P. to the edge of the circle)
- C** = chord length
- X** = height of crown
- CP** = center point
- AL** = arc length



CUSTOM ORDER ONLY, CALL FOR MANUFACTURING TIME.

Minimum Radius
 14'-7" / 175" (4445mm)
 to inside face of top track.
 (Warranty on hardware void if under minimum radius)

Floor Channel for Radius Application

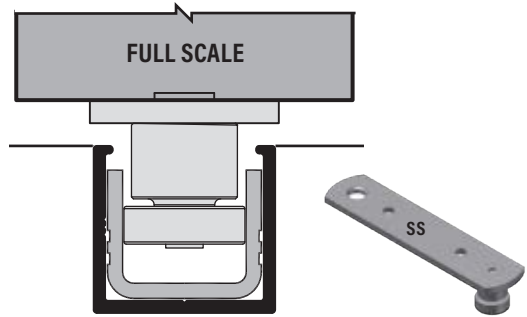

KT23D-RADIUS156 bronze anodized with PVC insert, 156" (3962mm)


KT-Radius Series

MAXIMUM DOOR WEIGHT:	Weights listed next to each track
MIN & MAX DOOR THICKNESS:	1-3/8" (35mm) to 1-3/4" (44.45mm)
MAXIMUM CAPACITY:	Width and height of the door may vary beyond standard sizes provided the weight of the door does not exceed the maximum weight listed .
VERTICAL ADJUSTMENT:	Listed next to each track
TRACK & CHANNEL:	Extruded aluminum, mill finish, clear or bronze anodized. Finishes listed below next to each track
HANGER:	Steel carrier, plated, 4 nylon wheels, ball bearing or Stainless steel carrier, 4 nylon wheels, ball bearing (see below).

PRODUCTS ON THIS PAGE CUSTOM ORDER ONLY, CALL FOR MANUFACTURING TIME.




Top Tracks Available for Radius Application

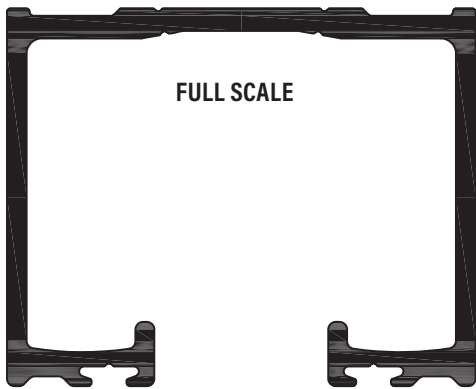

FULL SCALE

Weight:
650 lbs (300 kg) =
two hangers

Vertical adjustment:
1/4" (6.4mm)



FULL SCALE

Weight:
385 lbs (175 kg) =
two hangers

Vertical adjustment:
1/4" (6.4mm)

KT70D-RADIUS156 bronze anodized, 156" (3962mm)

KT41C-RADIUS156 aluminum clear anodized, 156" (3962mm)
KT41D-RADIUS156 bronze anodized, 156" (3962mm)



KT70HANGERSS stainless steel



KT41HANGER



KT82HANGERSS stainless steel